

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 DocumentNfeViewQueryService.findDocumentsWithData		764	29,183	2,477	7	3,816	0.00	2	753
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao=? and (documentnf0_type in (? , ? , ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.25	393	9,419	881			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vntf' AS NUMERIC)) AS total_vntf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcsf' AS NUMERIC)) AS total_vbcsf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ?	0.26	32	349	48			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (upper(documentnf0_issuer_name) like ?) and documentnf0_data_emissao<=? and documentnf0_data_emissao=? and (documentnf0_type in (? , ? , ?)) and documentnf0_cnpj_addressee=? order by documentnf0_nfe_number asc limit ?	0.01	60	105	38			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vntf' AS NUMERIC)) AS total_vntf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcsf' AS NUMERIC)) AS total_vbcsf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ? and d.data ->'nfe'->'infNFe'->'emit'->'xnome' = ?	0.04	110	1,624	360			0.00		
 select count(*) as col_0_0_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao=? and (documentnf0_type in (? , ? , ?)) and documentnf0_cnpj_addressee=?	0.15	9	82	8			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (upper(documentnf0_issuer_name) like ?) and documentnf0_data_emissao<=? and documentnf0_data_emissao=? and (documentnf0_type in (? , ? , ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.01	267	671	310			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabl7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_nfe_number=? and documentnf0_data_emissao<=? and documentnf0_data_emissao=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.50	945	19,955	2,815			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcs' AS NUMERIC)) AS total_vbcst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ? and d.data ->'chaveNfe' = ?	0.50	62	278	34			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabl7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (upper(documentnf0_issuer_name) like ?) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_nfe_number desc limit ?	0.03	46	127	23			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabl7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (documentnf0_cnpj_addressee=? or documentnf0_cnpj_issuer=?) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.01	81	152	61			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcs' AS NUMERIC)) AS total_vbcst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ? and d.cnpj_addressee = ?	0.01	22	23	0			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.01	113	212	85			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.01	21	28	6			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_nfe_number=? and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and substring(documentnf0_cnpj_addressee, 1, 8)=? order by documentnf0_data_emissao desc limit ?	0.01	10,094	28,943	11,586			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE SUBSTRING(d.cnpj_addressee, 1, 8) = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ? and d.data ->'chaveNfe' = ?	0.01	116	236	80			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and substring(documentnf0_cnpj_addressee, 1, 8)=? order by documentnf0_key asc limit ?	0.02	37	75	16			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnnpj_issuer = ds.cnnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE SUBSTRING(d.cnnpj_addressee, 1, 8) = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ?	0.02	12	89	24			0.00		
 select documentnf0_cnnpj_issuer as cnnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_ccc_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnnpj as cnnpj12_14_, documentnf0_cnnpj_addressee as cnnpj_ad13_14_, documentnf0_cnnpj_carrier as cnnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (documentnf0_cnnpj_addressee=? or documentnf0_cnnpj_issuer=?) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.01	265	1,502	546			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnnpj_issuer = ds.cnnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnnpj_addressee = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ? and d.cnnpj_addressee = ?	0.01	5	8	1			0.00		
 select documentnf0_cnnpj_issuer as cnnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_ccc_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnnpj as cnnpj12_14_, documentnf0_cnnpj_addressee as cnnpj_ad13_14_, documentnf0_cnnpj_carrier as cnnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?, ?, ?)) and documentnf0_cnnpj_addressee=? order by documentnf0_data_emissao desc limit ? offset ?	0.01	205	381	80			0.00		
 select documentnf0_cnnpj_issuer as cnnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_ccc_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnnpj as cnnpj12_14_, documentnf0_cnnpj_addressee as cnnpj_ad13_14_, documentnf0_cnnpj_carrier as cnnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	76	76	0			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	22	22	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_coracao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0 where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	50	50	0			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	17	17	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_coracao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0 where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.02	31	83	19			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?) and d.data_emissao between ? and ?	0.02	6	16	3			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.02	36	50	5			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.02	13	20	2			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.01	25	27	2			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?) and d.data_emissao between ? and ?	0.01	5	6	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_nfe_number=? and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.01	24	25	0			0.00		

Monitoring JavaMelody on ip-10-0-10-230.ec2.internal

[illegible]

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?) and d.data_emissao between ? and ?	0.01	7	12	2			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	49	49	0			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	14	14	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	60	60	0			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	13	13	0			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.02	41	65	7			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'>'fat'>>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'>'fat'>>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'>'fat'>>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.02	14	28	4			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	34	34	0			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'>'fat'>>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'>'fat'>>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'>'fat'>>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vnf' AS NUMERIC)) AS total_vnf, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'>'total'>'icmsTot'>>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	12	12	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.03	109	184	60			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpi_issuer = ds.cnpi_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpi_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.03	14	16	0			0.00		
 select documentnf0_cnpi_issuer as cnpi_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_ccc_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpi as cnpi12_14_, documentnf0_cnpi_addressee as cnpi_ad13_14_, documentnf0_cnpi_carrier as cnpi_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0 where (0=1 or documentnf0_cfops like ? or documentnf0_cfops like ? or documentnf0_cfops like ? or documentnf0_cfops like ? or documentnf0_cfops like ? or documentnf0_cfops like ? or documentnf0_cfops like ? or documentnf0_cfops like ? or documentnf0_cfops like ? or documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ? , ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpi_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	49	58	7			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpi_issuer = ds.cnpi_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpi_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ? , ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	8	8	0			0.00		
 select documentnf0_cnpi_issuer as cnpi_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_ccc_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpi as cnpi12_14_, documentnf0_cnpi_addressee as cnpi_ad13_14_, documentnf0_cnpi_carrier as cnpi_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0 where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (??)) and (documentnf0_type in (?, ?, ?)) and (documentnf0_key in (select documentci1_key from public.document_citadas documentci1 where documentci1_cnpi_citado=?)) order by documentnf0_data_emissao desc limit ?	0.00	26	27	0			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 SELECT SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vcfins' AS NUMERIC)) AS total_vcfins, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpi_issuer = ds.cnpi_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type INNER JOIN document_citadas dc ON d.key = dc.key AND d.protocol = dc.protocol AND d.nsu = dc.nsu AND d.type = dc.type AND d.cnpi_issuer = dc.cnpi_issuer WHERE dc.cnpi_citado = ? and d.type IN (?, ?, ?) and d.key in (?) and d.data_emissao between ? and ?	0.00	8	9	1			0.00		
 select documentnf0_cnpi_issuer as cnpi_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpi as cnpi12_14_, documentnf0_cnpi_addressee as cnpi_ad13_14_, documentnf0_cnpi_carrier as cnpi_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpi_carrier=? order by documentnf0_data_emissao desc limit ?	0.01	29	32	4			0.00		
 SELECT SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vbcs' AS NUMERIC)) AS total_vbcs, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vcfins' AS NUMERIC)) AS total_vcfins, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpi_issuer = ds.cnpi_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpi_carrier = ? and d.type IN (?, ?, ?) and d.key in (?) and d.data_emissao between ? and ?	0.01	25	44	19			0.00		
 select documentnf0_cnpi_issuer as cnpi_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpi as cnpi12_14_, documentnf0_cnpi_addressee as cnpi_ad13_14_, documentnf0_cnpi_carrier as cnpi_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (documentnf0_manifestation is null or documentnf0_manifestation in (?, ?, ?, ?)) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpi_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	606	606	0			0.00		
 select count(*) as col_0_0_ from public.document_nfe_view documentnf0_where (documentnf0_manifestation is null or documentnf0_manifestation in (?, ?, ?, ?)) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpi_addressee=?	0.00	9	9	0			0.00		

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vntf' AS NUMERIC)) AS total_vntf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcest' AS NUMERIC)) AS total_vbcest, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ? and (COALESCE((SELECT CASE WHEN ds.manifestation IS NOT NULL THEN ds.manifestation WHEN (item.historico ->>'eventCode') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN (item.historico ->>'eventCode') WHEN regexp_replace(item.historico ->>'description', ['^0-9'], "", 'gi') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN regexp_replace(item.historico ->>'description', ['^0-9'], "", 'gi') ELSE NULL END AS case FROM jsonb_array_elements(ds.history) WITH ORDINALITY item(historico, ordinality) WHERE (item.historico ->>'eventType') = ANY (ARRAY['NFE_EVENT_MANIFESTATION', 'NFE_EVENT']) ORDER BY (item.historico ->>'eventAt') DESC LIMIT 1), ds.manifestation) is null OR COALESCE((SELECT CASE WHEN ds.manifestation IS NOT NULL THEN ds.manifestation WHEN (item.historico ->>'eventCode') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN (item.historico ->>'eventCode') WHEN regexp_replace(item.historico ->>'description', ['^0-9'], "", 'gi') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN regexp_replace(item.historico ->>'description', ['^0-9'], "", 'gi') ELSE NULL END AS case FROM jsonb_array_elements(ds.history) WITH ORDINALITY item(historico, ordinality) WHERE (item.historico ->>'eventType') = ANY (ARRAY['NFE_EVENT_MANIFESTATION', 'NFE_EVENT']) ORDER BY (item.historico ->>'eventAt') DESC LIMIT 1), ds.manifestation) IN (?, ?, ?, ?))	0.00	48	48	0			0.00		
select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addressee6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (documentnf0_manifestation is null or documentnf0_manifestation in (?, ?, ?, ?)) and (documentnf0_status in (?, ?)) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	61	66	6			0.00		
select count(*) as col_0_0_ from public.document_nfe_view documentnf0_where (documentnf0_manifestation is null or documentnf0_manifestation in (?, ?, ?, ?)) and (documentnf0_status in (?, ?)) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=?	0.00	11	16	2			0.00		
SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vntf' AS NUMERIC)) AS total_vntf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcest' AS NUMERIC)) AS total_vbcest, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ? and ds.status IN (?, ?) and (COALESCE((SELECT CASE WHEN ds.manifestation IS NOT NULL THEN ds.manifestation WHEN (item.historico ->>'eventCode') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN (item.historico ->>'eventCode') WHEN regexp_replace(item.historico ->>'description', ['^0-9'], "", 'gi') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN regexp_replace(item.historico ->>'description', ['^0-9'], "", 'gi') ELSE NULL END AS case FROM jsonb_array_elements(ds.history) WITH ORDINALITY item(historico, ordinality) WHERE (item.historico ->>'eventType') = ANY (ARRAY['NFE_EVENT_MANIFESTATION', 'NFE_EVENT']) ORDER BY (item.historico ->>'eventAt') DESC LIMIT 1), ds.manifestation) is null OR COALESCE((SELECT CASE WHEN ds.manifestation IS NOT NULL THEN ds.manifestation WHEN (item.historico ->>'eventCode') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN (item.historico ->>'eventCode') WHEN regexp_replace(item.historico ->>'description', ['^0-9'], "", 'gi') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN regexp_replace(item.historico ->>'description', ['^0-9'], "", 'gi') ELSE NULL END AS case FROM jsonb_array_elements(ds.history) WITH ORDINALITY item(historico, ordinality) WHERE (item.historico ->>'eventType') = ANY (ARRAY['NFE_EVENT_MANIFESTATION', 'NFE_EVENT']) ORDER BY (item.historico ->>'eventAt') DESC LIMIT 1), ds.manifestation) IN (?, ?, ?, ?))	0.00	48	48	0			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (documentnf0_manifestation is null or documentnf0_manifestation in (?, ?, ?, ?)) and (documentnf0_status in (?, ?)) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and substring(documentnf0_cnpj_addressee, 1, 8)=? order by documentnf0_data_emissao desc limit ?	0.00	1,740	4,905	2,740			0.00		
 select count(*) as col_0_ from public.document_nfe_view documentnf0_where (documentnf0_manifestation is null or documentnf0_manifestation in (?, ?, ?, ?)) and (documentnf0_status in (?, ?)) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and substring(documentnf0_cnpj_addressee, 1, 8)=?	0.00	75	130	21			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcsst' AS NUMERIC)) AS total_vbcsst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE SUBSTRING(d.cnpj_addressee, 1, 8) = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ? and ds.status IN (?, ?) and (COALESCE((SELECT CASE WHEN ds.manifestation IS NOT NULL THEN ds.manifestation WHEN (item.historico ->'eventCode') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN (item.historico ->'eventCode') WHEN regexp_replace(item.historico ->'description', '[^0-9]', '', 'gi') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN regexp_replace(item.historico ->'description', '[^0-9]', '', 'gi') ELSE NULL END AS case FROM jsonb_array_elements(ds.history) WITH ORDINALITY item(historico, ordinality) WHERE (item.historico ->'eventType') = ANY (ARRAY['NFE_EVENT_MANIFESTATION', 'NFE_EVENT']) ORDER BY (item.historico ->'eventAt') DESC LIMIT 1), ds.manifestation) is null OR COALESCE((SELECT CASE WHEN ds.manifestation IS NOT NULL THEN ds.manifestation WHEN (item.historico ->'eventCode') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN (item.historico ->'eventCode') WHEN regexp_replace(item.historico ->'description', '[^0-9]', '', 'gi') = ANY (ARRAY['210200', '210210', '210220', '210240']) THEN regexp_replace(item.historico ->'description', '[^0-9]', '', 'gi') ELSE NULL END AS case FROM jsonb_array_elements(ds.history) WITH ORDINALITY item(historico, ordinality) WHERE (item.historico ->'eventType') = ANY (ARRAY['NFE_EVENT_MANIFESTATION', 'NFE_EVENT']) ORDER BY (item.historico ->'eventAt') DESC LIMIT 1), ds.manifestation) IN (?, ?, ?, ?))	0.00	381	381	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as addresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	67	67	0			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcsst' AS NUMERIC)) AS total_vbcsst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	18	18	0			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?)) and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	174	174	0			0.00		
 SELECT SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>'>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>'>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>'>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vbct' AS NUMERIC)) AS total_vbct, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vcfins' AS NUMERIC)) AS total_vcfins, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.key in (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	22	22	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where (documentnf0_status in (?)) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_data_emissao desc limit ?	0.00	133	133	0			0.00		
 SELECT SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>'>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>'>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>'>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vbct' AS NUMERIC)) AS total_vbct, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vcfins' AS NUMERIC)) AS total_vcfins, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>'>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?) and d.data_emissao between ? and ? and ds.status IN (?)	0.00	8	8	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?)) and (documentnf0_type in (?, ?, ?)) and substring(documentnf0_cnpj_addressee, 1, 8)=? order by documentnf0_data_emissao desc limit ?	0.01	29	41	9			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal


Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vntf' AS NUMERIC)) AS total_vntf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcest' AS NUMERIC)) AS total_vbcest, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpi_issuer = ds.cnpi_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE SUBSTRING(d.cnpi_adressee, 1, 8) = ? and d.type IN (?, ?, ?) and d.key in (?) and d.data_emissao between ? and ?	0.01	13	25	10			0.00		
 select count(*) as col_0_0_ from public.document_nfe_view documentnf0_where (documentnf0_cnpi_adressee=? or documentnf0_cnpi_issuer=?) and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpi_adressee=?	0.00	16	29	7			0.00		
 select documentnf0_cnpi_issuer as cnpi_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_adressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpi as cnpi12_14_, documentnf0_cnpi_adressee as cnpi_ad13_14_, documentnf0_cnpi_carrier as cnpi_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?) and (documentnf0_type in (?, ?, ?)) and substring(documentnf0_cnpi_carrier, 1, 8)=? order by documentnf0_data_emissao desc limit ?	0.00	25	25	0			0.00		
 SELECT SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'->'infNFe'->'cobr'->'fat'->'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vntf' AS NUMERIC)) AS total_vntf, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vbcest' AS NUMERIC)) AS total_vbcest, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'->'infNFe'->'total'->'icmsTot'->'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpi_issuer = ds.cnpi_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE SUBSTRING(d.cnpi_carrier, 1, 8) = ? and d.type IN (?, ?, ?) and d.key in (?) and d.data_emissao between ? and ?	0.00	9	9	0			0.00		
 select documentnf0_cnpi_issuer as cnpi_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_adressee_name as adresse6_14_, documentnf0_available_at as available7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_cce_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpi as cnpi12_14_, documentnf0_cnpi_adressee as cnpi_ad13_14_, documentnf0_cnpi_carrier as cnpi_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_key in (?) and (documentnf0_type in (?, ?, ?)) and (documentnf0_key in (select documentci1_key from public.document_citadas documentci1_where substring(documentci1_cnpi_citado, 1, 8)=?)) order by documentnf0_data_emissao desc limit ?	0.00	28	28	0			0.00		

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

[illegible]

Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
 SELECT SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vliq' AS NUMERIC)) AS total_valor_liquido, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vdesc' AS NUMERIC)) AS total_valor_desconto, SUM(CAST(d.data ->'nfe'>'infNFe'>'cobr'>'fat'>>'vorig' AS NUMERIC)) AS total_valor_origem, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vnt' AS NUMERIC)) AS total_vnt, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vbc' AS NUMERIC)) AS total_vbc, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vbcest' AS NUMERIC)) AS total_vbcest, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vst' AS NUMERIC)) AS total_vst, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vprod' AS NUMERIC)) AS total_vprod, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vipi' AS NUMERIC)) AS total_vipi, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vpis' AS NUMERIC)) AS total_vpis, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vcofins' AS NUMERIC)) AS total_vcofins, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'voutro' AS NUMERIC)) AS total_voutro, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vicms' AS NUMERIC)) AS total_vicms, SUM(CAST(d.data ->'nfe'>'infNFe'>'total'>'icmsTot'>>'vfrete' AS NUMERIC)) AS total_frete FROM document d INNER JOIN document_status ds ON d.key = ds.key and d.cnpj_issuer = ds.cnpj_issuer and d.protocol = ds.protocol and d.nsu = ds.nsu and d.type = ds.type WHERE d.cnpj_addressee = ? and d.type IN (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) and d.data_emissao between ? and ?	0.00	21	22	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_ccc_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and substring(documentnf0_cnpj_addressee, 1, 8)=? order by documentnf0_data_emissao desc limit ?	0.00	902	902	0			0.00		
 select count(*) as col_0_0_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and substring(documentnf0_cnpj_addressee, 1, 8)=?	0.00	15	15	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_ccc_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_nfe_number=? and documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_issuer_name asc limit ?	0.00	39	39	0			0.00		
 select documentnf0_cnpj_issuer as cnpj_iss1_14_, documentnf0_type as type2_14_, documentnf0_key as key3_14_, documentnf0_nsu as nsu4_14_, documentnf0_protocol as protocol5_14_, documentnf0_addressee_name as adresse6_14_, documentnf0_available_at as availabi7_14_, documentnf0_canceled_at as canceled8_14_, documentnf0_carta_correcao as carta_co9_14_, documentnf0_ccc_events as cce_eve10_14_, documentnf0_cfops as cfops11_14_, documentnf0_cnpj as cnpj12_14_, documentnf0_cnpj_addressee as cnpj_ad13_14_, documentnf0_cnpj_carrier as cnpj_ca14_14_, documentnf0_data as data15_14_, documentnf0_data_emissao as data_em16_14_, documentnf0_duplicatas as duplica17_14_, documentnf0_etiquetas as etiquet18_14_, documentnf0_fatura as fatura19_14_, documentnf0_issuer_name as issuer_20_14_, documentnf0_manifestation as manifes21_14_, documentnf0_name_file as name_fi22_14_, documentnf0_nfe_number as nfe_num23_14_, documentnf0_notas_referencia as notas_r24_14_, documentnf0_status as status25_14_, documentnf0_value as value26_14_ from public.document_nfe_view documentnf0_where documentnf0_data_emissao<=? and documentnf0_data_emissao>=? and (documentnf0_type in (?, ?, ?)) and documentnf0_cnpj_addressee=? order by documentnf0_issuer_name asc limit ?	0.00	238	408	240			0.00		

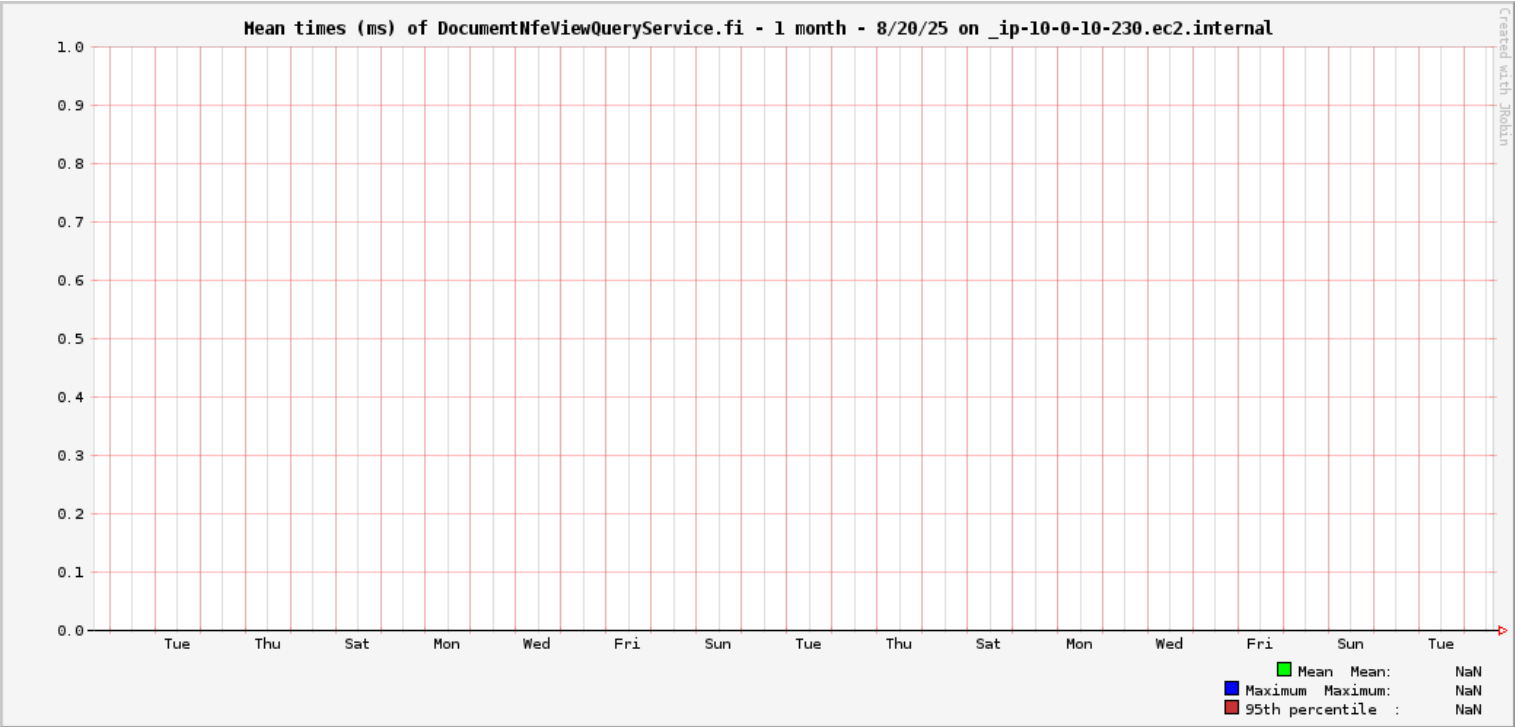

The units of the values are "m" for milli (1 / 1000), "k" for kilo/thousands, "M" for mega/millions, "G" for giga/billions and "u" for micro (1 / 1000000)