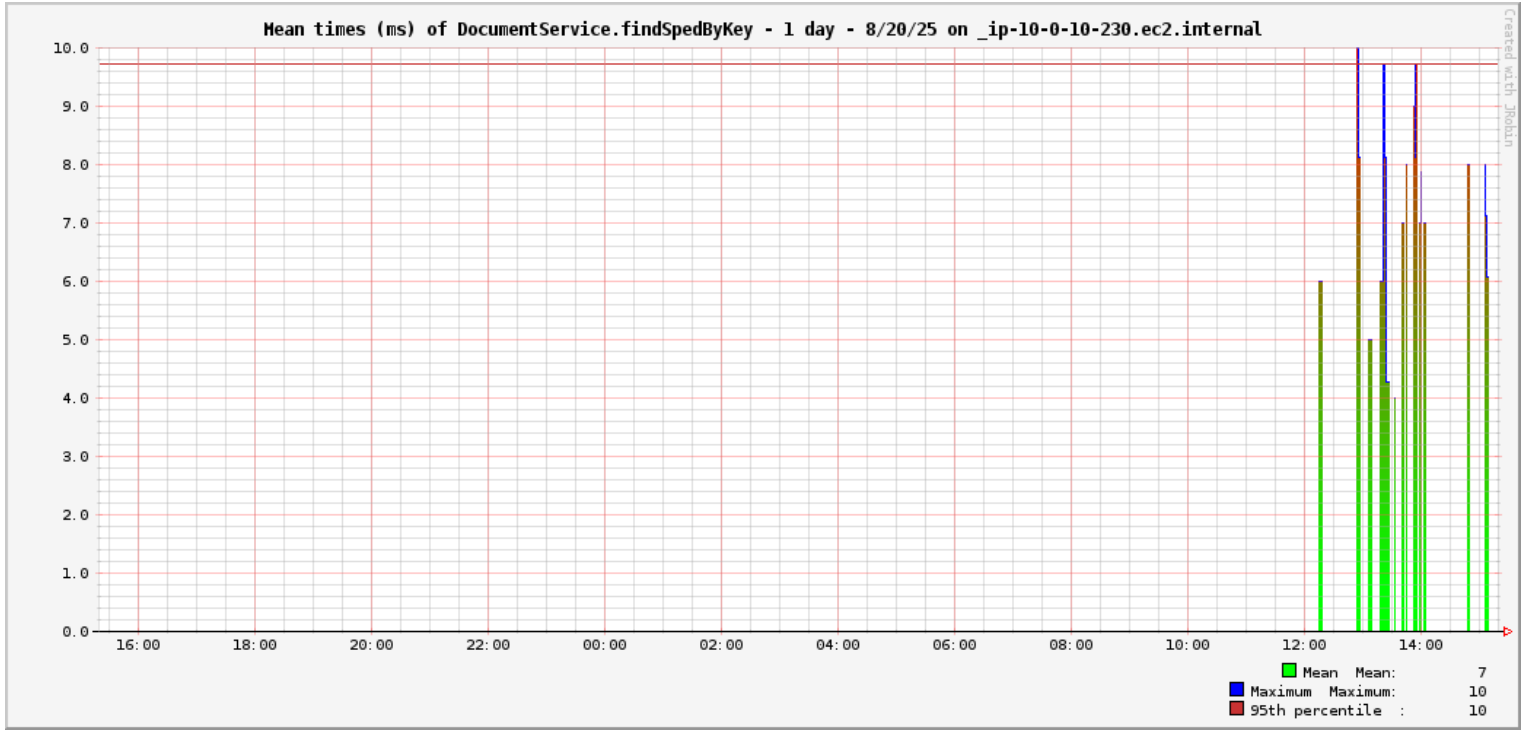# Monitoring JavaMelody on _ip-10-0-10-230.ec2.internal

| Request | Hits by parent request | Mean time (ms) | Max time (ms) | Standard deviation | Mean cpu time (ms) | Mean allocated Kb | % of system error | Mean hits sql | Mean time sql (ms) |
|---|---|---|---|---|---|---|---|---|---|
| ☕ DocumentService.findSpedByKey | | 8 | 65 | 5 | 0 | 75 | 0.00 | 1 | 6 |
| 🗄 select key,        type,          cast(data->'header'->>'version' as text) as version, cast(data->'header'->>'endsDate' as date) as periodo,          cast(data->'header'->>'endsDate' as date) as periodoFinal,          cast(data->'header'->>'startsDate' as date) as periodoInicial,          cast(data->'header'->>'ecdType' as text) as ecdType,          cast(data->'header'->>'finalType' as text) as purpose, name_file as nameFile,          cnpj,          cast(data->'header'->>'deliveryDate' as timestamp) as deliveryDate,          info->>'originalFileName' as fileNameOriginal,          inscricao_estadual as inscricaoEstadual        from document        where key = ?        and type like 'SPED%'         and data_emissao between ? and ? | 1.00 | 6 | 56 | 4 | | | 0.00 | | |



The units of the values are "m" for milli (1 / 1000), "k" for kilo/thousands, "M" for mega/millions, "G" for giga/billions and "u" for micro (1 / 1000000)