


## Monitoring JavaMelody on \_ip-10-0-9-199.ec2.internal

Request	Hits by parent request	Mean time (ms)	Max time (ms)	Standard deviation	Mean cpu time (ms)	Mean allocated Kb	% of system error	Mean hits sql	Mean time sql (ms)
DocumentService.listDocumentsByKeys		31	127	37	2	885	0.00	1	27
SELECT d.key, d.cnpi_issuer as issuerCnpj, d.cnpi_addressee as addresseeCnpj, d.type, d.data, d.info, d.nsu, ds.status, d.imported_at as importedAt, d.data_emissao as dataEmissao, d.data_entrada_saida as dataEntradaSaida FROM document d LEFT JOIN document_status ds ON d.key = ds.key AND d.cnpi_issuer = ds.cnpi_issuer AND d.protocol = ds.protocol AND d.nsu = ds.nsu AND d.type = ds.type WHERE d.key IN (?, ?) AND d.data_emissao BETWEEN ? AND ?	0.24	7	15	5			0.00		
SELECT d.key, d.cnpi_issuer as issuerCnpj, d.cnpi_addressee as addresseeCnpj, d.type, d.data, d.info, d.nsu, ds.status, d.imported_at as importedAt, d.data_emissao as dataEmissao, d.data_entrada_saida as dataEntradaSaida FROM document d LEFT JOIN document_status ds ON d.key = ds.key AND d.cnpi_issuer = ds.cnpi_issuer AND d.protocol = ds.protocol AND d.nsu = ds.nsu AND d.type = ds.type WHERE d.key IN (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) AND d.data_emissao BETWEEN ? AND ?	0.18	30	79	42			0.00		
SELECT d.key, d.cnpi_issuer as issuerCnpj, d.cnpi_addressee as addresseeCnpj, d.type, d.data, d.info, d.nsu, ds.status, d.imported_at as importedAt, d.data_emissao as dataEmissao, d.data_entrada_saida as dataEntradaSaida FROM document d LEFT JOIN document_status ds ON d.key = ds.key AND d.cnpi_issuer = ds.cnpi_issuer AND d.protocol = ds.protocol AND d.nsu = ds.nsu AND d.type = ds.type WHERE d.key IN (?) AND d.data_emissao BETWEEN ? AND ?	0.06	5	5	0			0.00		
SELECT d.key, d.cnpi_issuer as issuerCnpj, d.cnpi_addressee as addresseeCnpj, d.type, d.data, d.info, d.nsu, ds.status, d.imported_at as importedAt, d.data_emissao as dataEmissao, d.data_entrada_saida as dataEntradaSaida FROM document d LEFT JOIN document_status ds ON d.key = ds.key AND d.cnpi_issuer = ds.cnpi_issuer AND d.protocol = ds.protocol AND d.nsu = ds.nsu AND d.type = ds.type WHERE d.key IN (?, ?, ?, ?, ?) AND d.data_emissao BETWEEN ? AND ?	0.12	12	14	2			0.00		
SELECT d.key, d.cnpi_issuer as issuerCnpj, d.cnpi_addressee as addresseeCnpj, d.type, d.data, d.info, d.nsu, ds.status, d.imported_at as importedAt, d.data_emissao as dataEmissao, d.data_entrada_saida as dataEntradaSaida FROM document d LEFT JOIN document_status ds ON d.key = ds.key AND d.cnpi_issuer = ds.cnpi_issuer AND d.protocol = ds.protocol AND d.nsu = ds.nsu AND d.type = ds.type WHERE d.key IN (?, ?, ?) AND d.data_emissao BETWEEN ? AND ?	0.06	7	7	0			0.00		
SELECT d.key, d.cnpi_issuer as issuerCnpj, d.cnpi_addressee as addresseeCnpj, d.type, d.data, d.info, d.nsu, ds.status, d.imported_at as importedAt, d.data_emissao as dataEmissao, d.data_entrada_saida as dataEntradaSaida FROM document d LEFT JOIN document_status ds ON d.key = ds.key AND d.cnpi_issuer = ds.cnpi_issuer AND d.protocol = ds.protocol AND d.nsu = ds.nsu AND d.type = ds.type WHERE d.key IN (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) AND d.data_emissao BETWEEN ? AND ?	0.12	89	122	46			0.00		
SELECT d.key, d.cnpi_issuer as issuerCnpj, d.cnpi_addressee as addresseeCnpj, d.type, d.data, d.info, d.nsu, ds.status, d.imported_at as importedAt, d.data_emissao as dataEmissao, d.data_entrada_saida as dataEntradaSaida FROM document d LEFT JOIN document_status ds ON d.key = ds.key AND d.cnpi_issuer = ds.cnpi_issuer AND d.protocol = ds.protocol AND d.nsu = ds.nsu AND d.type = ds.type WHERE d.key IN (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) AND d.data_emissao BETWEEN ? AND ?	0.12	11	18	9			0.00		
SELECT d.key, d.cnpi_issuer as issuerCnpj, d.cnpi_addressee as addresseeCnpj, d.type, d.data, d.info, d.nsu, ds.status, d.imported_at as importedAt, d.data_emissao as dataEmissao, d.data_entrada_saida as dataEntradaSaida FROM document d LEFT JOIN document_status ds ON d.key = ds.key AND d.cnpi_issuer = ds.cnpi_issuer AND d.protocol = ds.protocol AND d.nsu = ds.nsu AND d.type = ds.type WHERE d.key IN (?, ?, ?, ?, ?, ?, ?, ?, ?, ?, ?) AND d.data_emissao BETWEEN ? AND ?	0.12	52	88	50			0.00		

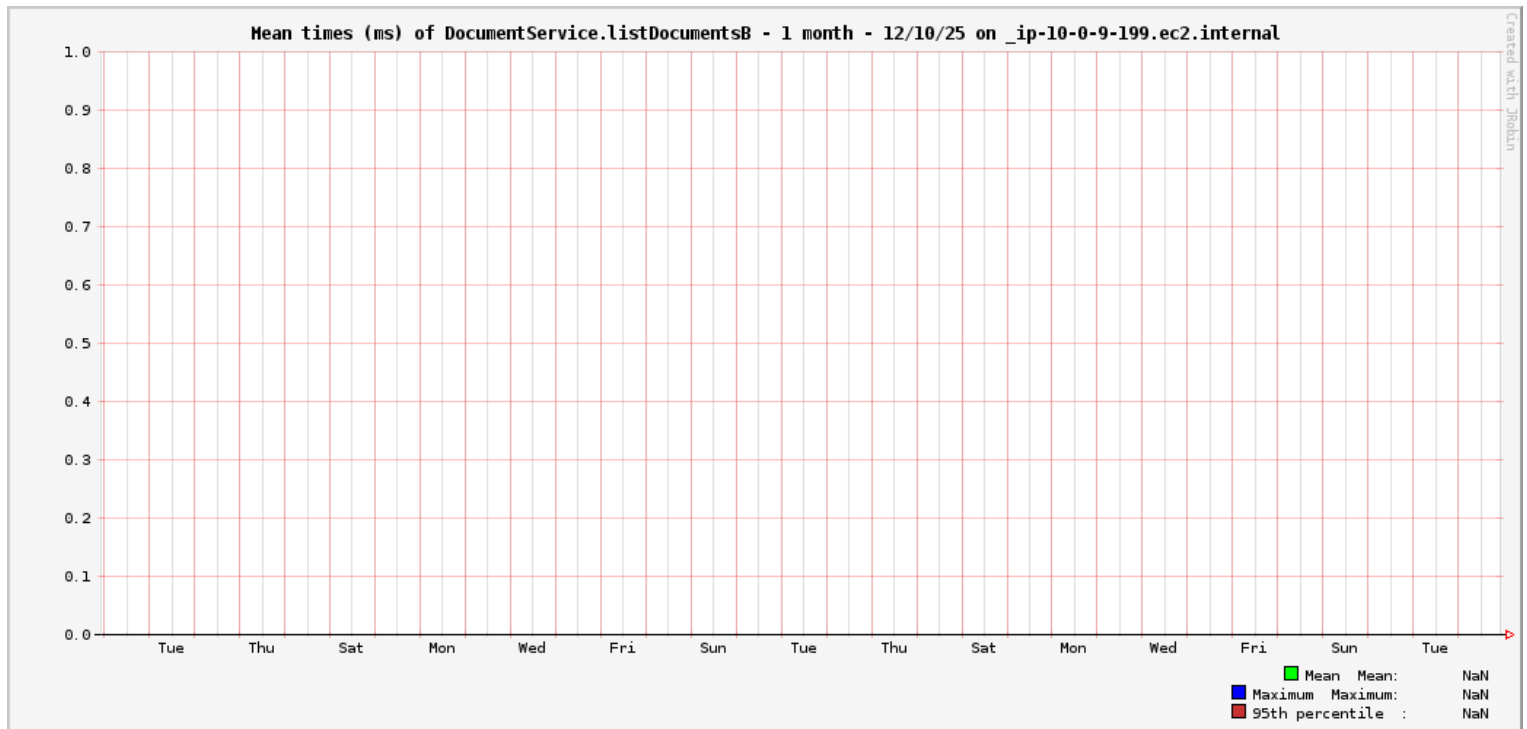

The units of the values are "m" for milli (1 / 1000), "k" for kilo/thousands, "M" for mega/millions, "G" for giga/billions and "u" for micro (1 / 1000000)